


S. 50-700

RETIRED BELT

SCANBELT

TLF.+45 98 90 90 88-FAX+45 98 90 96 06
WWW.SCANBELT.COM

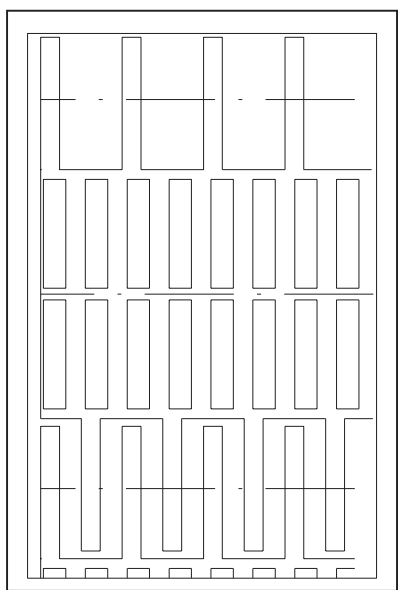

(1:1)

Belt data		
Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	810	5
Polypropylene (PP)	1490	5
Polyacetal (POM)	2235	8

Belt surface: Flat top.
 Open area: 45%. Biggest opening 3.5 x 14 mm.
 Strength: The right belt for medium-heavy transportation.
 Material/colour: PE/nat, PP/white and grey. POM/blue.
 Cleanability: Excellent.
 Accessories: 50, 75, 100 and 150 mm side guards. Hold-down.
 Application: Cooling/freezing belts for seafood, meat, bakery, vegetables, peeled shrimps and other industries that handle products requiring a large air-flow.
 Width interval: 12 mm. e.g: 24 mm, 36 mm, 48 mm etc.

Sprocket data			
No. of teeth Z	A= Outside diameter mm	B= Pitch diameter mm	C= Inside diameter mm
6	117	101	85
8	149	133	117
10	180	164	148
12	211	195	179
16	275	259	243

Hub specifications					
Hub width 40 mm	No. of teeth				
	6Z	8Z	10Z	12Z	16Z
Square bore mm.	38x38	30x30	38x38	38x38	40x40
	40x40	38x38	40x40	40x40	50x50
Round bore mm.		40x40	60x60	60x60	60x60
			65x65	65x65	65x65
					80x80
		ø25	ø25	ø30	ø30
		ø30	ø30	ø40	ø40
	ø40	ø40	ø50	ø50	
			ø60	ø60	ø60
			ø80	ø80	ø80

